



Quickie GP/GPV - SMD
March 2019



EIGP70

Mark For: Date: _____ Dealer Acct #: _____ Dealer: _____ Dealer Contact: _____ Dealer Address: _____ Dealer City: _____ PV: _____ PC: _____ Dealer Phone: () _____ Fax: () _____ Confirmation E-Mail: _____ Confirm Via: <input type="checkbox"/> Fax <input type="checkbox"/> E-mail	Submitting for: <input type="checkbox"/> Quote <input type="checkbox"/> Order PO#: _____ ADDITIONAL SHIPPING INFORMATION Ship To: _____ Attention: _____ Address: _____ Address: _____ Ship To City: _____ PV: _____ PC: _____ Ship To Phone: () _____ Fax: () _____
---	--

✓	Option #	Definition	Price	✓	Option #	Definition	Price
---	----------	------------	-------	---	----------	------------	-------

1. FRAME

Base Model			
<input type="checkbox"/>	024WM23	Quickie GP-70°	
<input type="checkbox"/>	024WM23	Quickie GPV-70° (NA 12"-13")	

Frame Angle			
<input type="checkbox"/>	024FA6	60° (N/A 18 1/4" and 19 1/4" frame length)	
<input type="checkbox"/>	024FA7	70°	
<input type="checkbox"/>	024FA1	75° (N/A with rigid footrest)	
<input type="checkbox"/>	024FA8	80° (N/A with rigid footrest)	

2. SIZE / SEATING

Seat Width			
<i>Seat Width 1/2" Narrower</i>			
<input type="checkbox"/>	024W3	12"	
<input type="checkbox"/>	024W4	13"	
<input type="checkbox"/>	024W5	14"	
<input type="checkbox"/>	024W6	15"	
<input type="checkbox"/>	024W7	16"	
<input type="checkbox"/>	024W8	17"	
<input type="checkbox"/>	024W9	18"	
<input type="checkbox"/>	024W41	19"	
<input type="checkbox"/>	024W11	20"	
<input type="checkbox"/>	024W12	21"	
<input type="checkbox"/>	024W13	22"	

Frame Length			
<input type="checkbox"/>	024FL30	18-1/4" (Avail. on 12" Sling Depth)	
<input type="checkbox"/>	024FL31	19-1/4" (Avail. on 13" Sling Depth)	
<input type="checkbox"/>	024FL32	20-1/4" (Avail. on 14", 15" Sling Depth)	
<input type="checkbox"/>	024FL33	21-1/4" (Avail. on 14", 15", 16" Sling Depth)	
<input type="checkbox"/>	024FL34	22-1/4" (Avail. on 16", 17" Sling Depth)	
<input type="checkbox"/>	024FL35	23-1/4" (Avail. on 17", 18" Sling Depth)	
<input type="checkbox"/>	024FL36	24-1/4" (Avail. on 18" Sling Depth)	
<input type="checkbox"/>	024FL37	25-1/4" (Avail. on 19" Sling Depth)	
<input type="checkbox"/>	024FL38	26-1/4" (Avail. on 20" Sling Depth)	
<input type="checkbox"/>	024FL39	27-1/4" (Avail. on 21" Sling Depth)	
<input type="checkbox"/>	024FL40	28-1/4" (Avail. on 22" Sling Depth)	

Seat Depth			
<i>21" & 22" seat depths only available with 16" or wider chairs</i>			
<input type="checkbox"/>	024SD5	12"	
<input type="checkbox"/>	024SD6	13"	
<input type="checkbox"/>	024SD7	14"	
<input type="checkbox"/>	024SD8	15"	
<input type="checkbox"/>	024SD9	16"	
<input type="checkbox"/>	024SD10	17"	
<input type="checkbox"/>	024SD11	18"	
<input type="checkbox"/>	024SD72	19"	
<input type="checkbox"/>	024SD13	20"	
<input type="checkbox"/>	024SD14	21"	
<input type="checkbox"/>	024SD33	22"	

Frame Height			
<i>See Appendix 11 for height chart. Short frame N/A w/Xtender</i>			
<input type="checkbox"/>	024FH2	Short (front 9.25"-rear 8.25") N/A with Xtender Power Assist	
<input type="checkbox"/>	024FH5	Standard (front 10" - rear 9")	
<input type="checkbox"/>	024FH7	Tall (front 11" - rear 10")	

3. CASTERS

Caster Wheels			
<input type="checkbox"/>	024CW3	4" Low Profile Polyurethane	J
<input type="checkbox"/>	024CW31	4" Micro Lighted	OTP
<input type="checkbox"/>	024CW6	5" Soft Roll Semi-Pneumatic	OTP
<input type="checkbox"/>	024CW5	5" Low Profile Polyurethane	
<input type="checkbox"/>	024CW7	5" x 1.5" Semi-Pneumatic <i>only avail. For use in bottom fork holes</i>	OTP
<input type="checkbox"/>	024CW33	6" Pneumatic	
<input type="checkbox"/>	024CW34	6" Polyurethane	
<input type="checkbox"/>	024CW35	6" x 1.5" Semi-Pneumatic <i>only avail. For use in bottom fork holes</i>	
<input type="checkbox"/>	024CW21	8" Pneumatic <i>Only available on 60° frame option</i>	J

Caster Wheels - Continued			
<input type="checkbox"/>	024CW32	8" Polyurethane <i>Only available on 60° frame option</i>	
<input type="checkbox"/>	024CW36	8" x 2" Pneumatic <i>Only available on 60° frame option</i>	J
<input type="checkbox"/>	024CW37	8" x 2" Pneumatic w/Airless Insert <i>Only available on 60° frame option</i>	J

Caster Fork			
<input type="checkbox"/>	024CS5	3/4" Longer Fork Stem Bolt	
<input type="checkbox"/>	024CS9	1-1/2" Longer Fork Stem Bolt	
<input type="checkbox"/>	024CS3	Caster Pin Locks	OTP

4. REAR WHEELS

Rear Wheel Tire			
<input type="checkbox"/>	024RT1	Pneumatic	
<input type="checkbox"/>	024RT2	Pneumatic Airless Insert <i>N/A with 26" wheels & Xtender</i>	
<input type="checkbox"/>	024RT3	Full Poly <i>N/A with 26" wheels</i>	
<input type="checkbox"/>	024RT6	High-Pressure Clincher	OTP

Hand Rim			
<input type="checkbox"/>	024HR1	Aluminum Anodized	
<input type="checkbox"/>	024HR4	Plastic Coated <i>-N/A on all rims</i>	J
<input type="checkbox"/>	024HR7	Omit Hand Rim	J

Projection Hand Rim			
<i>Projections N/A w/ plastic coated handrims. N/A w/ Spoke guards</i>			
<input type="checkbox"/>	024HR8	8 Oblique (24"/26")	

Rear Wheel Size			
<i>Spinergy N/A w/ Xtender, spoke guards. Contact Built 4 Me for Spinergy Color Options</i>			
<input type="checkbox"/>	024RW8	22" Mag	
<input type="checkbox"/>	024RW9	22" Spoke	
<input type="checkbox"/>	024RW1	24" Mag	
<input type="checkbox"/>	024RW2	24" Spoke	
<input type="checkbox"/>	024RW42	24" Spinergy (540) SPOX Black	OTP
<input type="checkbox"/>	024RR25	Omit Rear Wheel and Axle Intended Size for Set Up :	

Axle			
<input type="checkbox"/>	024AX1	Quick Release Steel	
<input type="checkbox"/>	024AX11	Quad Quick Release	OTP

Axle Plate			
<input type="checkbox"/>	024AL2	Standard Adjustable	
<input type="checkbox"/>	024AL13	Double Slotted Adjustable	
<input type="checkbox"/>	024AL6	Amputee Adjustable <i>N/A with padded swing-away armrests or stroller handles</i>	J

5. WHEEL LOCKS

Wheel Lock			
<input type="checkbox"/>	024WL1	High Mount Push	
<input type="checkbox"/>	024WL2	High Mount Pull	
<input type="checkbox"/>	024WL5	High Mount Scissor <i>N/A w/ extension handles, grade aides</i>	
<input type="checkbox"/>	024WL12	Do Not Mount Wheel Locks	J
<input type="checkbox"/>	024WL10	Omit	J

Extension Handle			
<input type="checkbox"/>	024EH1	6" Pair	

Grade Aid			
<input type="checkbox"/>	024GA1	Grade Aid <i>N/A w/ poly, high-pressure clincher tires, or Xtender</i>	OTP

6. FOOTREST

Footplates

Heel loop or leg strap not included, See Footplate Options Section

1. GP FOOTREST OPTIONS

<input type="checkbox"/>	024F56	Rigid <i>N/A w/ Ext. Tubes; N/A with 75° or 80° frame angle</i>	
<input type="checkbox"/>	024F50	Platform <i>N/A w/ Ext. Tubes</i>	
<input type="checkbox"/>	024F1	Composite Footplate	
<input type="checkbox"/>	024F3	Adult Angle Adj.	
<input type="checkbox"/>	024F48	Platform Flip Up	J

2. GPV FOOTREST OPTIONS

<input type="checkbox"/>	024F56	Rigid <i>N/A w/ Ext. Tubes; N/A with 75° or 80° frame angle</i>	
<input type="checkbox"/>	024F50	Platform <i>N/A w/ Ext. Tubes</i>	
<input type="checkbox"/>	024F48	Platform Flip Up	J

Footrest Extension Tubes

<input type="checkbox"/>	024E1	Short (14" to 16-1/2")	
<input type="checkbox"/>	024E2	Medium (16-1/2" to 19")	
<input type="checkbox"/>	024E5	Long (19" to 21-1/2")	
<input type="checkbox"/>	024E16	High Mount <i>Only avail. with adult angle adjustable footplates</i>	

Footplate Options (Ext Tube & Direct Mount)

<input type="checkbox"/>	024HL1	Heel Loop	
<input type="checkbox"/>	024HL5	Leg Strap	
<input type="checkbox"/>	024HL4	Omit Heel Loop	
<input type="checkbox"/>	024HL6	Omit Leg Strap	
<input type="checkbox"/>	024F7	Omit Footplate & Ext Tube	
<input type="checkbox"/>	024IG2	Impact Guard Neoprene	OTP

7. BACKREST

Back Type

<input type="checkbox"/>	024BT3	Non-Folding Backrest (Fixed) <i>N/A with push handles or adj. upholstery</i>	
<input type="checkbox"/>	024BB1	8" Back Height	
<input type="checkbox"/>	024BB2	9" Back Height	
<input type="checkbox"/>	024BB3	10" Back Height	
<input type="checkbox"/>	024BB4	11" Back Height	
<input type="checkbox"/>	024BB5	12" Back Height	
<input type="checkbox"/>	024BB6	13" Back Height	
<input type="checkbox"/>	024BB7	14" Back Height	
<input type="checkbox"/>	024BB8	15" Back Height	
<input type="checkbox"/>	024BB9	16" Back Height	
<input type="checkbox"/>	024BT1	Folding Backrest (Adjustable)	
<input type="checkbox"/>	024BA1	11" - 14" Back Height	
<input type="checkbox"/>	024BA2	12" - 16" Back Height	
<input type="checkbox"/>	024BA3	14" - 18" Back Height	
<input type="checkbox"/>	024BA4	16" - 20" Back Height	

Back Upholstery

<input type="checkbox"/>	024BU1	Standard	
<input type="checkbox"/>	024BU8	Adjustable	OTP
<input type="checkbox"/>	024BU16	Reinforced <i>(N/A w/ adj. upholstery)</i>	J
<input type="checkbox"/>	024BU14	Omit Back Upholstery	J

Backrest Options

<input type="checkbox"/>	024BT33	Folding w/ Integral Push Handles	
<input type="checkbox"/>	024SR2	Regular Stroller Handle <i>N/A with amputee axle plate</i>	J
<input type="checkbox"/>	024SR3	Tall Stroller Handle <i>N/A with amputee axle plate</i>	J

8. ARMREST / SIDEGUARDS

Single Post

<input type="checkbox"/>	024AA9	Single Post Ht. Adjust. Low <i>Must be removed to fold back down</i>	
<input type="checkbox"/>	024AM1	Desk Length - Classic (10")	
<input type="checkbox"/>	024AM2	Full Length - Classic (14")	
<input type="checkbox"/>	024AA8	Single Post Ht. Adjust. Std <i>Must be removed to fold back down</i>	
<input type="checkbox"/>	024AM1	Desk Length - Classic (10")	
<input type="checkbox"/>	024AM2	Full Length - Classic (14")	

Padded Swing Away Armrest

All Padded Swing-Away N/A with amputee axle plate or Xtender Power Assist

<input type="checkbox"/>	024AA19	Padded S-A Medium	
<input type="checkbox"/>	024AA16	Padded S-A Adult	

Side Guard

<input type="checkbox"/>	024SG3	Plastic Regular	OTP
<input type="checkbox"/>	024SG4	Plastic Kids	OTP

9. KEY OPTIONS AND ACCESSORIES

Rear Anti-Tip

<input type="checkbox"/>	024AT1	Rear Anti-Tip	
--------------------------	--------	---------------	--

Spoke Guards

N/A w/ Xtender Power Assist; Only available w/ Mag and Spoke wheels

<input type="checkbox"/>	024A23	Black Spoke Guards	OTP
<input type="checkbox"/>	024A24	Clear Spoke Guards	OTP

Positioning Belts

<input type="checkbox"/>	024A142	Belt 1.5" Auto Buckle w/Clamps	
--------------------------	---------	--------------------------------	--

Standard Frame Colors

☐ 024C2 | Black (Not available as base w/ Zebra)

11. APPENDIX

GP Series Rear STF Chart

*All measurements given are an estimate and have been rounded to the nearest .5"

SHORT Frame (9 1/4" Front / 8 1/4" Rear)			Rear Axle Plate Hole Position					
Wheel	Rim	Tire	Standard			Inverted		
			Top	Middle	Bottom	Top	Middle	Bottom
22"	Mag / Spoke	Full Poly	14.5	15	15.5	16	16.5	17
22"	Mag / Spoke	Pneum / Insert	14.5	15	16	16	17	17.5
24"	Mag / Spoke	Full Poly	15	15.5	16.5	16.5	17	17.5
24"	Spoke / Spinerger	Clincher	15	16	16.5	16.5	17	18
24"	Mag / Spoke / Spinerger	Pneum / Insert	15.5	16	17	17	17.5	18
26"	Spoke / Spinerger	Clincher	16	17	17.5	17.5	18	19
26"	Spoke / Spinerger	Pneumatic	16.5	17	17.5	18	18.5	19

TALL Frame (11" Front / 10" Rear)			Rear Axle Plate Hole Position					
Wheel	Rim	Tire	Standard			Inverted		
			Top	Middle	Bottom	Top	Middle	Bottom
22"	Mag / Spoke	Full Poly	16	16.5	17.5	17.5	18	19
22"	Mag / Spoke	Pneum / Insert	16.5	17	17.5	18	18.5	19
24"	Mag / Spoke	Full Poly	17	17.5	18	18.5	18.5	19.5
24"	Spoke / Spinerger	Clincher	17	17.5	18	18.5	19	19.5
24"	Mag / Spoke / Spinerger	Pneum / Insert	17	17.5	18.5	19	19	20
26"	Spoke	Clincher	18	18.5	19	19.5	20	20.5
26"	Spoke	Pneumatic	18	19	19.5	19.5	20	21


STANDARD Frame (10" Front / 9" Rear)			Rear Axle Plate Hole Position					
Wheel	Rim	Tire	Standard			Inverted		
			Top	Middle	Bottom	Top	Middle	Bottom
22"	Mag / Spoke	Full Poly	15	15.5	16.5	16.5	17.5	18
22"	Mag / Spoke	Pneum / Insert	15.5	16	17	17	17.5	18
24"	Mag / Spoke	Full Poly	16	16.5	17	17	18	18.5
24"	Spoke / Spinerger	Clincher	16	16.5	17	17.5	18	18.5
24"	Mag / Spoke / Spinerger	Pneum / Insert	16	16.5	17.5	17.5	18	18.5
26"	Spoke / Spinerger	Clincher	17	17.5	18	18.5	19	19.5
26"	Spoke / Spinerger	Pneumatic	17	18	18.5	18.5	19.5	20

Maximum Dump 2 3/4"
 *** Custom Frame Height Through Configurator - REAR 6 1/2 - 13" (Max frame squeeze = 3 1/2") Calculate Accordingly

GP Series Front STF Chart

*All measurements given are an estimate and have been rounded to the nearest .5"

Frame Dimensions

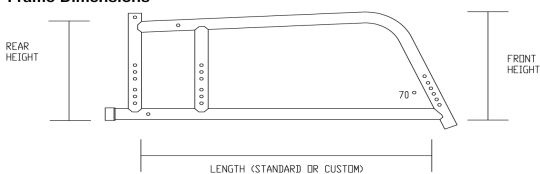

SHORT Frame (9 1/4" Front / 8 1/4" Rear)			3"	4" Poly	5" Poly	6" Poly	6" Pneu	8" Poly	8" Pneu	8x2
Fork	Spacer	Fork Hole	4" Lighted	5" Soft Roll	6" x 1.5					
			4 1/4	STD	Bottom	15.50	16.00	16.50	17.00	17.00
4 1/4	3/4	Bottom	16.50	17.00	17.00	17.50	18.00	x	x	x
4 1/4	1 1/2	Bottom	17.00	17.50	18.00	18.50	18.50	x	x	x
5 1/4	STD	Top	x	x	16.50	17.00	17.00	x	x	x
5 1/4	STD	Bottom	16.50	17.00	17.5	18.00	18.00	19.00	20.5	x
5 1/4	3/4	Top	x	x	17.50	18.00	18.00	x	x	x
5 1/4	3/4	Bottom	17.50	18.00	18.50	18.50	19.00	19.50	20.00	x
5 1/4	1 1/2	Top	x	x	18.00	18.50	18.50	x	x	x
5 1/4	1 1/2	Bottom	18.00	18.50	19.00	19.50	19.50	20.50	20.50	x
6	STD	Top	x	x	17.50	18.00	18.00	18.50	19.00	x
6	STD	Bottom	17.50	18.00	18.50	19.00	19.00	19.50	20.00	x
6	3/4	Top	x	x	18.00	18.50	18.50	19.00	19.50	x
6	3/4	Bottom	18.00	18.50	19.00	19.50	19.50	20.50	20.50	x
6	1 1/2	Top	x	x	19.00	19.50	19.50	20.00	20.50	x
6	1 1/2	Bottom	19.00	19.50	20.00	20.50	20.50	21.00	21.50	x
7	STD	Top	x	x	18.50	19.00	19.00	19.50	20.00	x
7	STD	Bottom	18.50	19.00	19.50	20.00	20.00	20.50	21.00	x
7	3/4	Top	x	x	19.00	19.50	19.50	20.50	20.50	x
7	3/4	Bottom	19.00	19.50	20.00	20.50	20.50	21.50	21.50	x
7	1 1/2	Top	x	x	20.00	20.50	20.50	21.00	21.50	x
7	1 1/2	Bottom	20.00	20.50	21.00	21.00	21.50	22.00	22.50	x
8x2	STD	Top	x	x	x	x	x	x	x	19.00
8x2	STD	Bottom	x	x	x	x	x	x	x	20.00
8x2	3/4	Top	x	x	x	x	x	x	x	19.50
8x2	3/4	Bottom	x	x	x	x	x	x	x	20.50
8x2	1 1/2	Top	x	x	x	x	x	x	x	20.50
8x2	1 1/2	Bottom	x	x	x	x	x	x	x	21.00

STANDARD Frame (10" Front / 9" Rear) ADD 3/4" to each measurement above
 TALL Frame (11" Front / 10" Rear) ADD 1 3/4" to each measurement above

*** Custom Frame Height through Configurator - Front 9 - 13" - Calculate Accordingly (Minimum Front STF = 15 1/2" / Max = 26")